



Date: August 10, 2020

ADDENDUM NO: ONE

TO ALL OFFERORS:

REFERENCE: RFQ No: 2021-08131-11
Commodity: Circuit Court Monuments Removal – Package A
RFQ Due On: Thursday, August 13, 2020

Please note the clarifications and/or changes made to this solicitation:

1. Addendum # 1 – Please see attached structural engineering report dated 8/7/20. This report provides additional information regarding the Monument Removal project at the Albemarle County Circuit Court at Court Square.
2. For the immediate COVID 19 emergency, notary requirements are waived. However, all documents should be properly completed and signed.
3. All other terms and conditions of the solicitation remain unchanged. Quotations must be received in accordance with the solicitation requirements by **1:00pm on Thursday, August 13, 2020**. Late quotations will not be considered.
4. A signed acknowledgement of this addendum must be received by this office attached to your quotation. Signature on this addendum does not constitute your signature on the original quotation document. The original quotation document must be signed also.

Sincerely,
Sharon Cash
Sharon Cash, VCO, VCCO
Buyer II
Phone: (434) 296-5854

Attachments

Name of Firm

Signature/Title

Date

Printed Name



08/07/2020

ESCM No. 0820-467

& Construction Management PLLC

Harrisonburg
540-442-8787

Charlottesville
434-202-8527

Richmond
804-433-3124

www.ensoln.com

Blake Abplanalp

Chief – Facilities Planning & Construction
County of Albemarle | Facilities & Environmental Services
401 McIntire Road
Charlottesville, VA 22902-4596

PH - 434-872-4501, Ext. 3244
Fax - 434-972-4091
Cell - 434-825-1663

babplanalp@albemarle.org

Re: Court Square Statue

Engineering Solutions and Construction Management (ESCM) is proud to have the opportunity to work with you on this project.

Project Description

We assessed the statue located at Court Square in Charlottesville, VA on 08/06/2020. Attached please find the estimated weights and configuration of the statue's parts. It appears these parts are dry stacked using malleable shims. We expect there is little to no attachment between the parts to preclude disassembly in a top down fashion.

In addition to the statue we have estimated the weights of the surrounding ornaments:

Cannon x 2

Bronze 5' long Cannon with 4" bore on decorative steel carriage, each wheel and the tail sit on a small stone base.

Estimated weight of cannon and carriage is 2800lbs



Stack of Cannonballs x 1

The stack of balls is embedded in concrete mortar and sits upon a triangular concrete base that is 42"x4" thick.


Estimated weight is 800lbs.



This report is covered by our standard terms and conditions. Should you have any questions, please do not hesitate to contact our office. We look forward to the conclusion of this project.

Sincerely,
ENGINEERING SOLUTIONS AND CONSTRUCTION MANAGEMENT, PLLC

Tom A. McLaughlin, P.E.
Partner

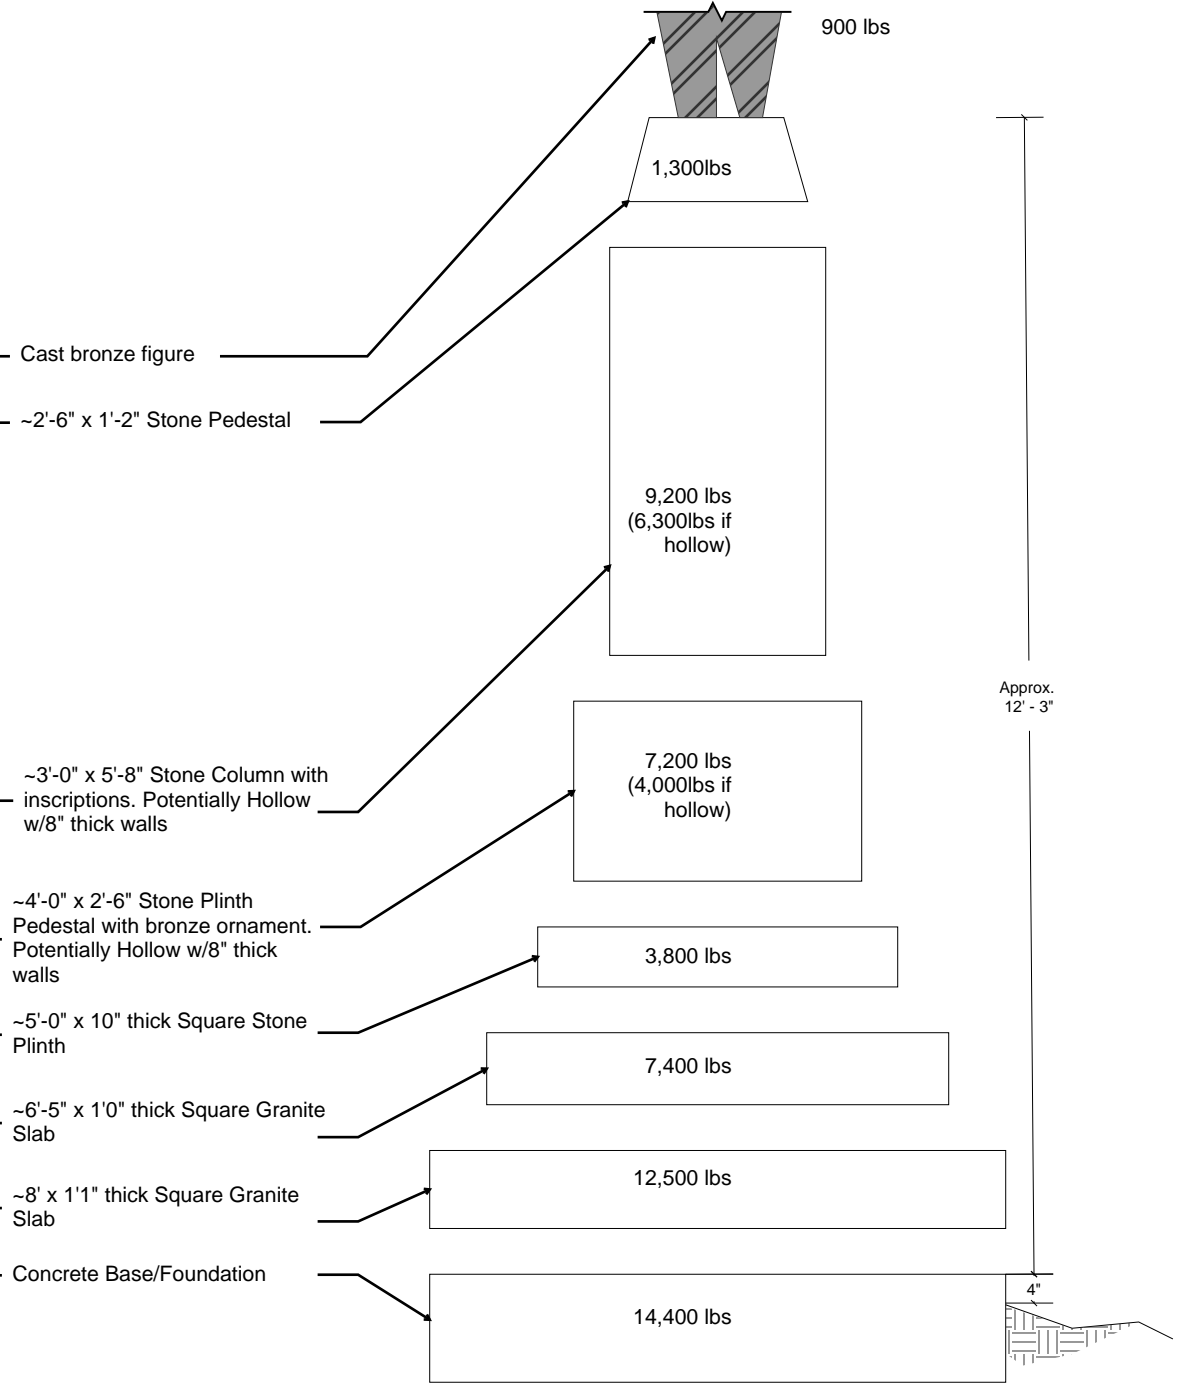

- Cast bronze figure
- ~2'-6" x 1'-2" Stone Pedestal
- ~3'-0" x 5'-8" Stone Column with inscriptions. Potentially Hollow w/8" thick walls
- ~4'-0" x 2'-6" Stone Plinth Pedestal with bronze ornament. Potentially Hollow w/8" thick walls
- ~5'-0" x 10" thick Square Stone Plinth
- ~6'-5" x 1'-0" thick Square Granite Slab
- ~8' x 1'-1" thick Square Granite Slab
- Concrete Base/Foundation